M57737

144-148MHz, 12.5V, 30W, FM MOBILE RADIO

OUTLINE DRAWING

Dimensions in mm

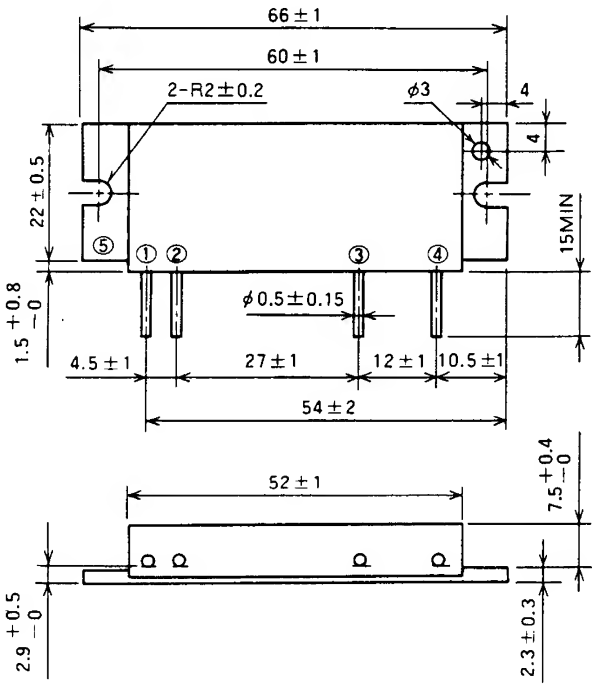

H2

BLOCK DIAGRAM

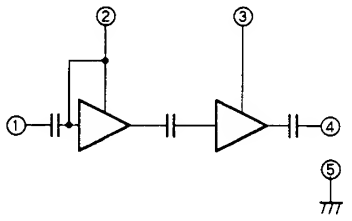

PIN :
①Pin : RF INPUT
②Vcc1 : 1st. DC SUPPLY
③Vcc2 : 2nd. DC SUPPLY
④Po : RF OUTPUT
⑤GND : FIN

ABSOLUTE MAXIMUM RATINGS (Tc = 25℃ unless otherwise noted)

Symbol	Parameter	Conditions	Ratings	Unit
Vcc	Supply voltage		17	V
Icc	Total current		7	A
$P_{in(max)}$	Input power	$Z_G = Z_L = 50\ \Omega$	0.4	W
$P_{O(max)}$	Output power	$Z_G = Z_L = 50\ \Omega$	40	W
$T_{C(OP)}$	Operation case temperature		− 30 to 110	℃
T_{stg}	Storage temperature		− 40 to 110	℃

Note. Above parameters are guaranteed independently.

ELECTRICAL CHARACTERISTICS (Tc = 25℃ unless otherwise noted)

Symbol	Parameter	Test conditions	Limits		Unit
			Min	Max	
f	Frequency range	P_{in} = 0.2W Vcc = 12.5V $Z_G = Z_L = 50\ \Omega$	144	148	MHz
Po	Output power		30		W
η_T	Total efficiency		45		%
2fo	2nd. harmonic			− 25	dBc
3fo	3rd. harmonic			− 30	dBc
ρ_{in}	Input VSWR			2.8	−
−	Load VSWR tolerance	Vcc = 15.2V, Po = 35W (P_{in} : controlled) Load VSWR=20:1 (All phase), 5sec. Z_G = 50Ω	No degradation or destroy		−

Note. Above parameters, ratings, limits and conditions are subject to change.

MITSUBISHI ELECTRIC

TYPICAL PERFORMANCE DATA

OUTPUT POWER, TOTAL EFFICIENCY, INPUT VSWR VS. FREQUENCY

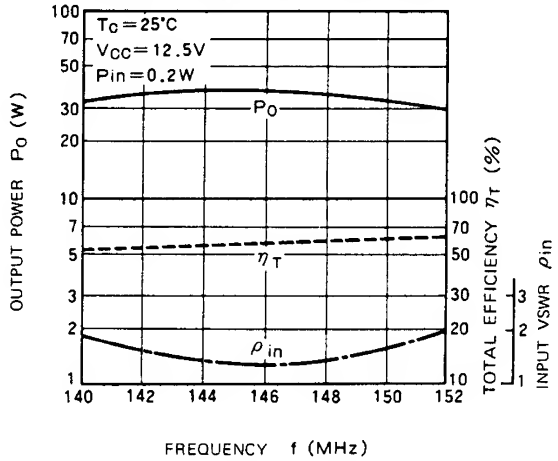

OUTPUT POWER, 1st CURRENT TOTAL CURRENT VS. INPUT POWER

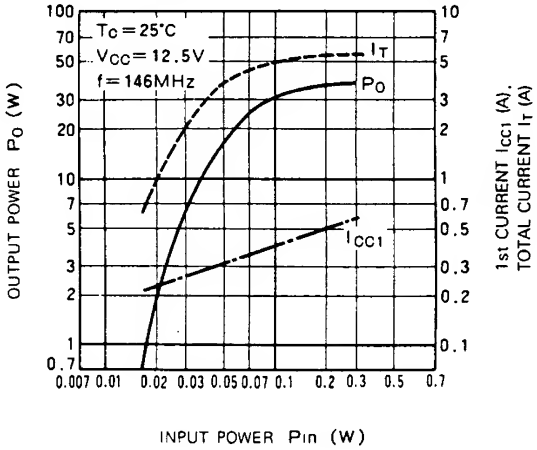

OUTPUT POWER, FINAL CURRENT VS. 1st VOLTAGE

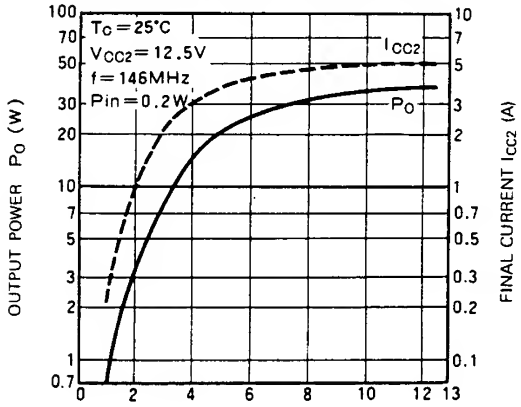

OUTPUT POWER, TOTAL CURRENT VS. DC SUPPLY VOLTAGE

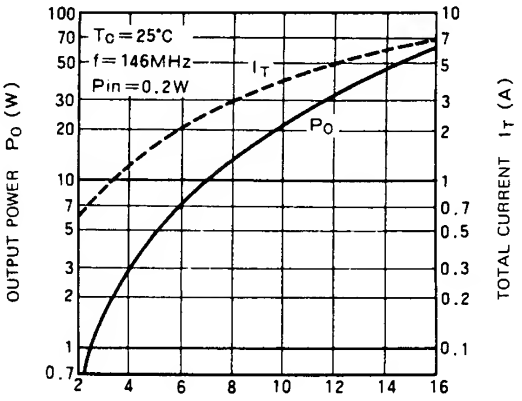

INPUT INPEDANCE VS. FREQUENCY

Tc=25°C
Vcc1=Vcc2=12.5V
f=144-148MHz
Pin=0.2W
Zℓ=50Ω

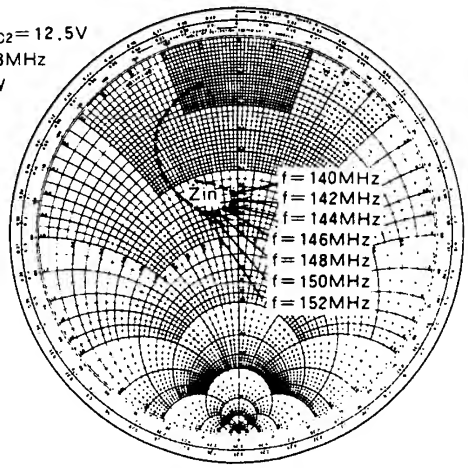

DESIGN CONSIDERATION OF HEAT RADIATION

Please refer to following consideration when designing heat sink.

1. Junction temperature of incorporated transistors at standard operation.

(1) Thermal resistance between junction and package of incorporated transistors.

a) First stage transistor

$R_{th(j-c)1}$ = 8°C/W (Typ.)

b) Second stage transistor

$R_{th(j-c)2}$ = 2°C/W (Typ.)

(2) Junction temperature of incorporated transistors at stadard operation.

- Conditions for standard operation.

P_O = 28W, V_{CC} = 12.5V, P_{in} = 0.2W, η_T = 45% (minimum rating), P_O1 (Note 1) = 5W, I_T = 5.0A (I_{T1} (2) = 0.9A, I_{T2} (3) = 4.1A)

DESNote 1: Output power of the first stage transistor

Note 2: Circuit current of the first stage transistor

Note 3: Circuit current of the final stage transistor

- Junction temperature of the first stage transistor

$T_{j1} = (V_{CC} \times I_{T1} - P_{o1} + P_{in}) \times R_{th(j-c)1} + T_C$ (4)

$= (12.5 \times 0.9 - 5 + 0.2) \times 8 + T_C$

$= 52 + T_C$ (°C)

Note 4: Package temperature of device

- Junction temperature of the final stage transistor

$T_{j2} = (V_{CC} \times I_{T2} - P_O + P_{o1}) \times R_{th(j-c)2} + T_C$

$= (12.5 \times 4.1 - 28 + 5) \times 2 + T_C$

$= 57 + T_C$ (°C)

2. Heat sink design;

In thermal design of heat sink, try to keep the package temperature at the upper limit of the operating ambinet temperature (normally T_a = 60°C) and at the output power of 28W below 90°C.

The thermal resistance $R_{th(c-a)}$ (5) of the heat sink to realize this:

$$R_{th(c-a)} = \frac{T_C - T_a}{(P_O/\eta_T) - P_O + P_{in}} = \frac{90 - 60}{(28/0.45) - 28 + 0.2}$$

$= 0.87$ (°C/W)

Note 5: Inclusive of the contact thermal resistance between device and heat sink

Mounting the heat sink of the above thermal resistance on the device,

T_{j1} = 142°C, T_{j2} = 147°C at T_a = 60°C, T_C = 90°C.

In the annual average of ambient temperature is 30°C,

T_{j1} = 112°C, T_{j2} = 118°C

As the maximum junction temperature of these incorporated transistors T_{jmax} are 175°C, application under fully derated condition is ensured.